

NO INK

NO INK

NO INK

NO INK

NO INK

NO INK

NO INK


NO INK

NO INK

NO INK

GUIDE

GRIP

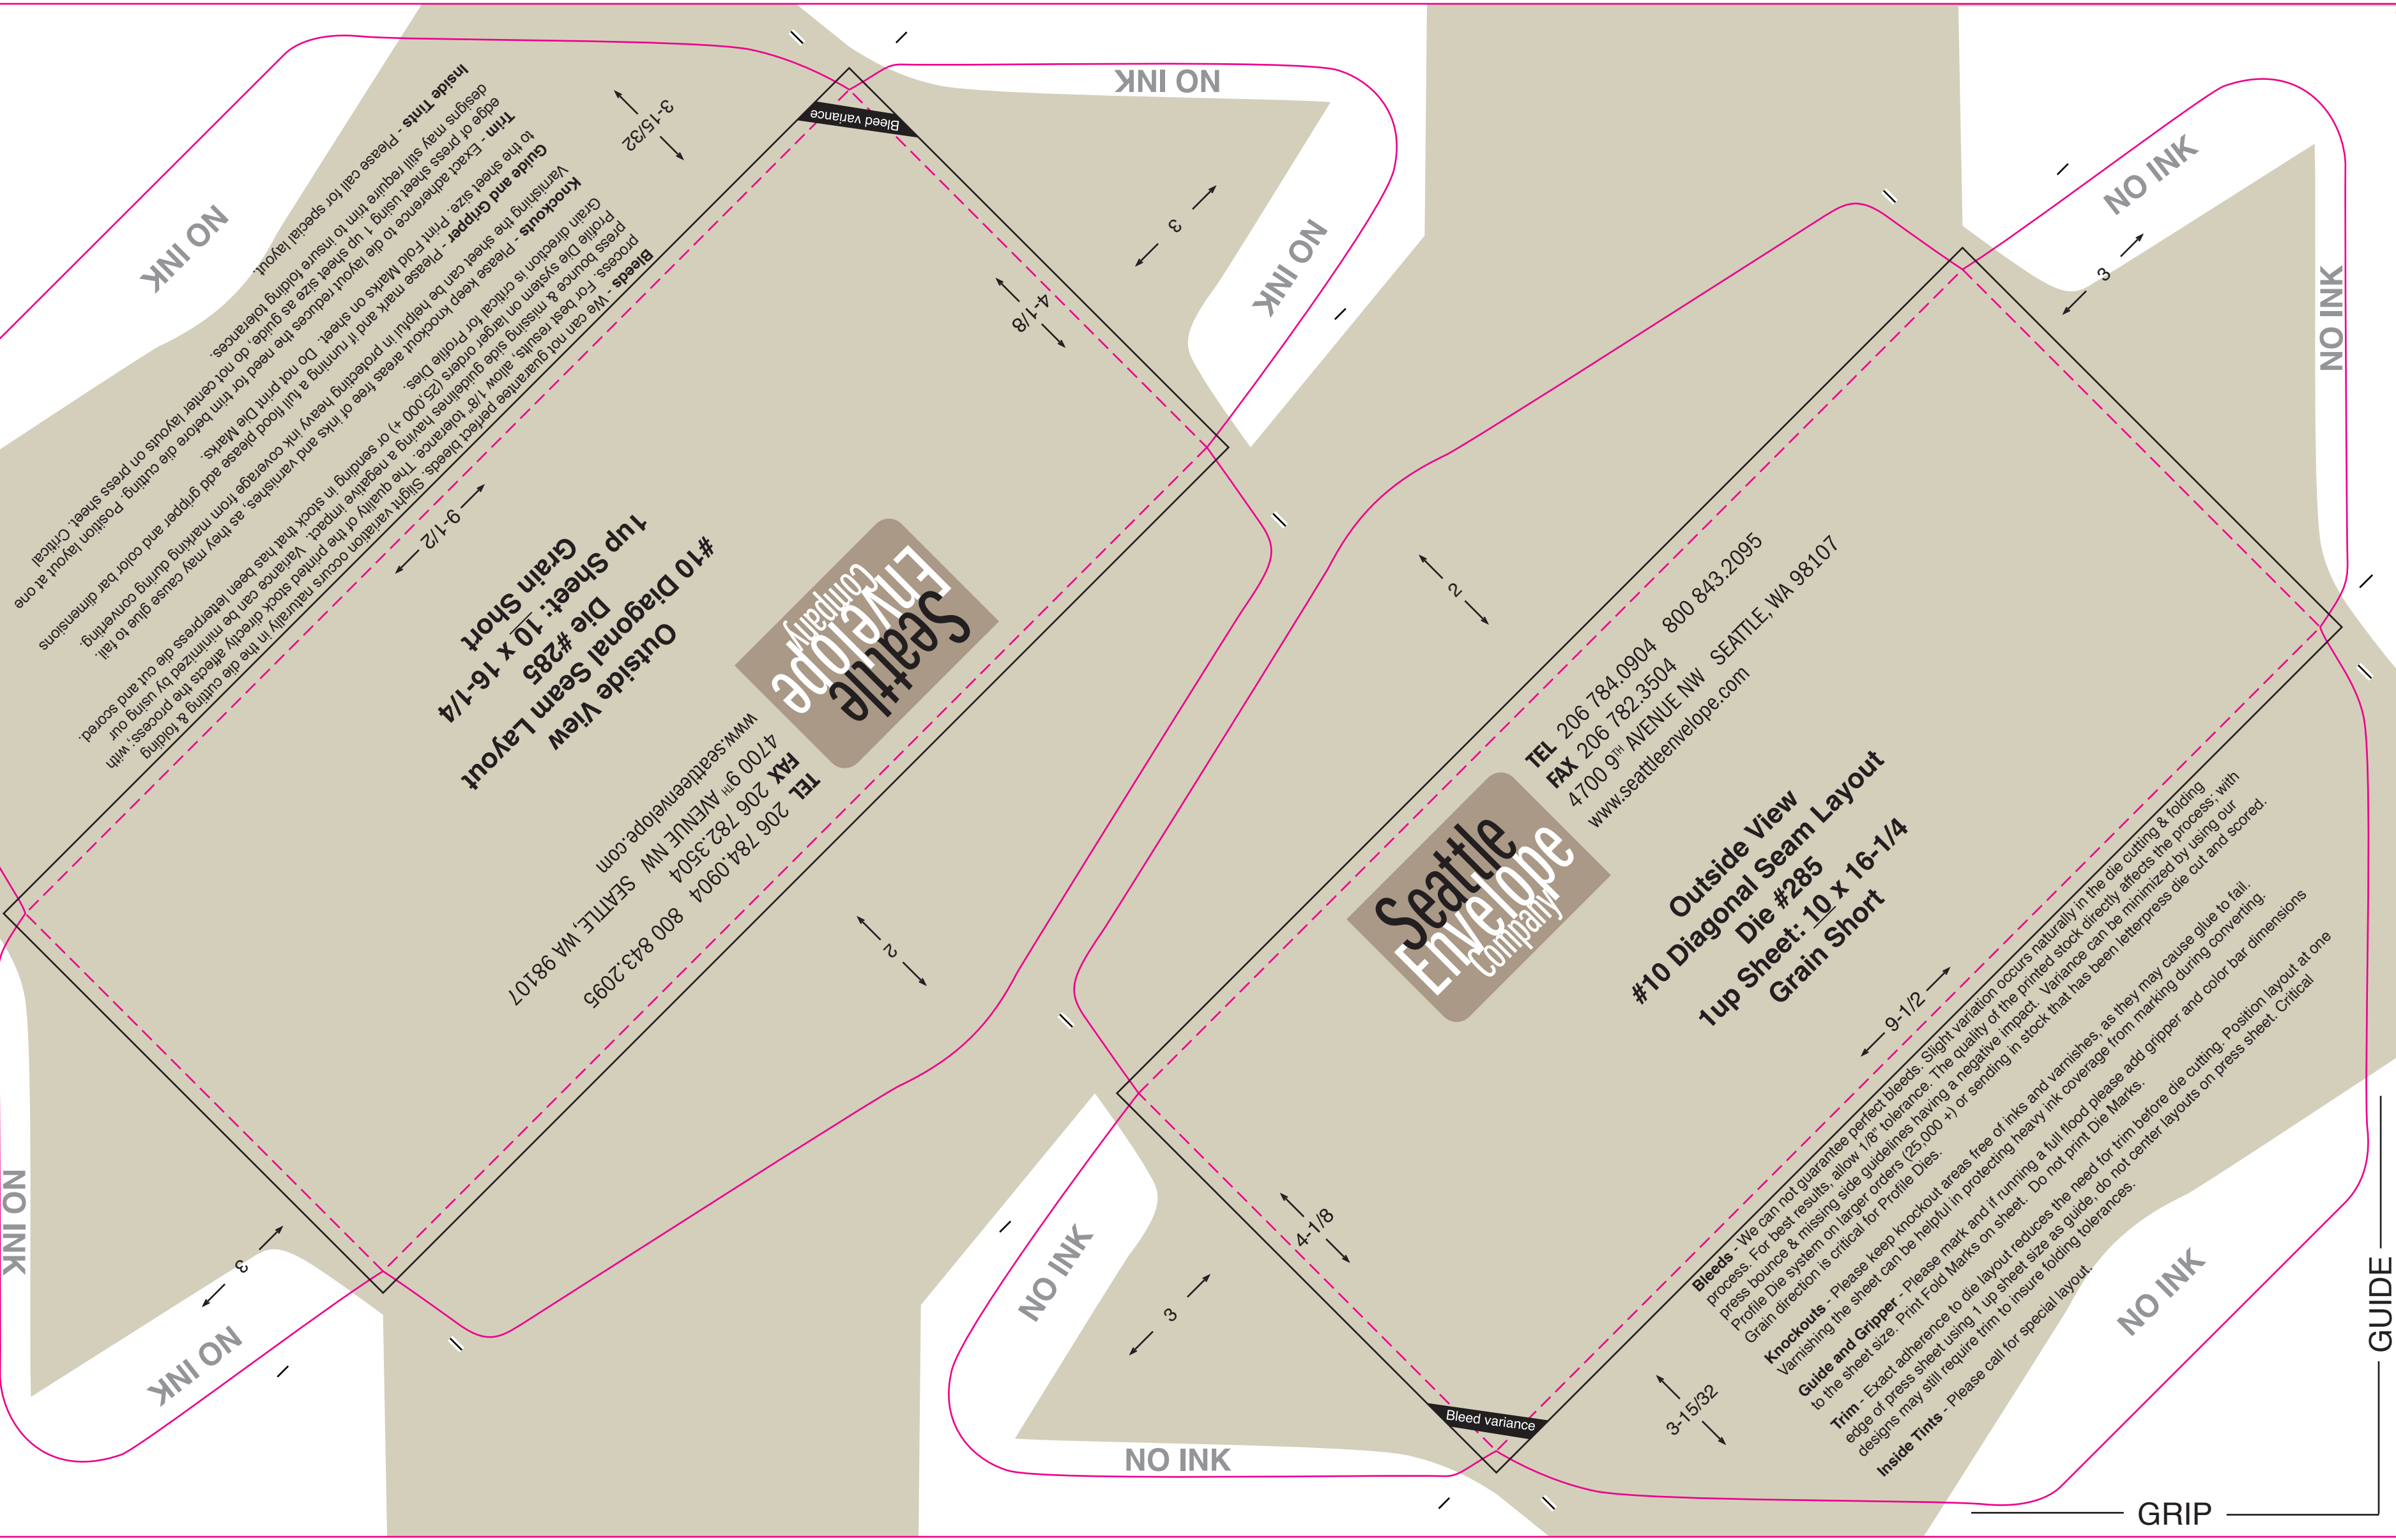

Trim - Exact adherence to die layout reduces the need for trim before die cutting. Position layout at one edge of press sheet using 1 up sheet size as guide; do not center layouts on press sheet. Critical designs may still require trim to insure folding tolerances.

Inside Tints - Please call for special layout.

Knockouts - Please keep knockout areas free of inks and varnishes, as they may cause glue to fail. Varnishing the sheet can be helpful in protecting heavy ink coverage from marking during converting. Grain direction is critical for Profile Dies.

Profile Die system - For best results, allow 1/8" tolerance. The quality of the printed stock can be minimized by using our process. For best results, allow 1/8" tolerance. The quality of the printed stock can be minimized by using our process. For best results, allow 1/8" tolerance. The quality of the printed stock can be minimized by using our process.

Bleeds - We can not guarantee perfect bleeds. Slight variation occurs naturally in the die cutting & folding process. For best results, allow 1/8" tolerance. The quality of the printed stock can be minimized by using our process. For best results, allow 1/8" tolerance. The quality of the printed stock can be minimized by using our process.

Guide and Gripper - Please mark and if running a full flood please add gripper and color bar dimensions to the sheet size. Print Fold Marks on sheet. Do not print Die Marks.

Seattle Envelope Company

Outside View

Die #285

1up Sheet: 10 x 16-1/4

Grain Short

TEL 206 784.0904 800 843.2095

FAX 206 782.3504

4700 9TH AVENUE NW SEATTLE, WA 98107

www.seattleenvelope.com

Seattle Envelope Company

Outside View

Die #285

1up Sheet: 10 x 16-1/4

Grain Short

TEL 206 784.0904 800 843.2095

FAX 206 782.3504

4700 9TH AVENUE NW SEATTLE, WA 98107

www.seattleenvelope.com

Bleeds - We can not guarantee perfect bleeds. Slight variation occurs naturally in the die cutting & folding process. For best results, allow 1/8" tolerance. The quality of the printed stock directly affects the process, with press bounce & missing side guidelines having a negative impact. Variance can be minimized by using our Profile Die system on larger orders (25,000 +) or sending in stock that has been letterpress die cut and scored. Grain direction is critical for Profile Dies.

Knockouts - Please keep knockout areas free of inks and varnishes, as they may cause glue to fail. Varnishing the sheet can be helpful in protecting heavy ink coverage from marking during converting.

Guide and Gripper - Please mark and if running a full flood please add gripper and color bar dimensions to the sheet size. Print Fold Marks on sheet. Do not print Die Marks.

Trim - Exact adherence to die layout reduces the need for trim before die cutting. Position layout at one edge of press sheet using 1 up sheet size as guide; do not center layouts on press sheet. Critical designs may still require trim to insure folding tolerances.

Inside Tints - Please call for special layout.